

PRINT ON VIRTUALLY ANY MEDIA!

CMYK + WWWW

UP TO 2880 DPI RESOLUTION

PRINT ON MEDIA UP TO 6 INCHES TALL

DUAL LED LAMPS

(Instant Ink Curing)





BEST. EVER.

The X- 36 UV Printer cannot be beat.

Large flatbed printers designed for signage and graphics print at high speeds, but are limited by substrate thickness.

Small format printers designed for specialty items print at slower speeds and are limited by substrate length and width.

The Xanté family of X-UV Printers do BOTH. It's the best of both worlds.



Signage • Manufacturing • Specialty Items • Industrial • Packaging



CONTACT US TODAY FOR MORE INFORMATION.

251.473.6502



Simply Brilliant Color Workflow

INCLUDED!

Welcome to iQueue Prepress Software

Xante builds on its innovative workflow software with powerful team-based productivity in iQueue 14.

True server-client operation enhances your workflow to optimize the talents and time of everyone involved in production. Take advantage of your entire team of IT

Create a new job or simply drag and drop your file into the queue.





iQueue features include:

- Independent CMYK Density Controls
- PANTONE® Color Library
- Right-ON® Spot Color Matching
- QR Code Generator
- Full Imposition and Tiling
- PDF-Out AND SO MUCH MORE!



specialists, designers, and printer operators to simplify prepress tasks such as job sharing and job cost estimating, file editing tools, patented Right-ON® Spot Color Matching and much more. Create attention-grabbing displays with VividHD-UV ink. And, with instant curing, your customers will appreciate the fast, durable results.

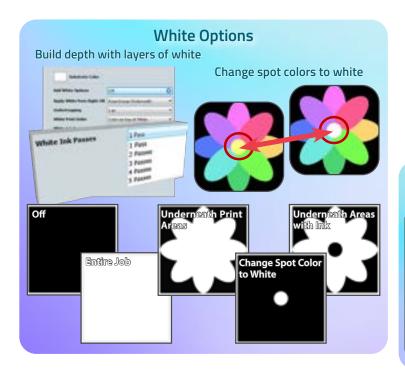



Imposition allows you to optimize your page layout by placing images in the maximum number of columns and rows while also supporting margins and gutters.





SPECIFICATIONS

PRIN	TING	CAPA	BILI	TIES

Imaging area:	36" x 24" (91.4cm x 60.9cm)
Max. media size:	36" x 24" (91.4cm x 60.9cm)
Min. media size:	.5" x .5"
Max. print height:	6" (15.24 cm)
Media transport:	41.3" x 24" (104.9cm x 60.9cm) Vacuum bed
Print colors:	CMYK + WWWW
Resolution:	720/1080/1440/2160/2880 DPI Resolutions
UV lamp:	Dual LED, 385-415 nM, low heat curing lamps

INK AND MEDIA

Media types:	PVC plastic, styrene, wood, aluminum, metal, acrylics, coroplast, ceramics, fabric,				
	The maximum shelf life is 1 (one) year from Date of Manufacture (DoM). Once opened, the shelf life is 2 (two) months or 1 (one) year from DoM, whichever comes first.				
Ink type:	UV, 500 mL bottles per color				

**			•		. ,	•		•	
	leather c	nmnnsites	nanerhoard	toamboard	σΙαςς	carnet	, tile and moi	7	

PRINTER CONNECTIVITY 1-Gigabit Ethernet

PREPRESS SOFTWARE

Xanté iQueue Workflow: Adobe® PostScript® 3™, Independent CMYK Density Control, Spot Color Matching, Imposition, Digital File Editing, Variable Printing, and much more

WEIGHTS, DIMENSIONS

Dimensions: 58"L x 63"W x 24"H (147 x 160 x 60cm)

Net/Gross weight: 398.2 lbs (181kg)

Power supply: 110v or 220v 50-60hz

WORKING CONDITION

Operating temperature: 22-26°C (68°F - 78°F)

Relative hum idity: 50-80RH







iQueue Simply Brilliant Workflow (Included)

Digital Color Workflow with Advanced Color Matching and File Management Tools